

BHTS ZZ 320°

Beco Plus





Insert Bearings for Extreme Temperature Pillow Blocks for Extreme Temperature

Technical characteristics:

- Bearing material: steel AISI 52100 (Chrome) stabilized to the application
- Treatment of manganese phosphate coating on all steel parts of the bearing
- Radial Clearance 4xC5
- Shields type ZZ
- Lubricated for entire life with BECO grease for temperatures up to 320°C
- Grease food approved
- Do not need additional lubrication
- Housing in Stainless Steel
- Pillow Blocks UCPA and UCT Series also available



Fields of application:

- Trolleys for food industry
- Wafer oven
- Breadstick oven

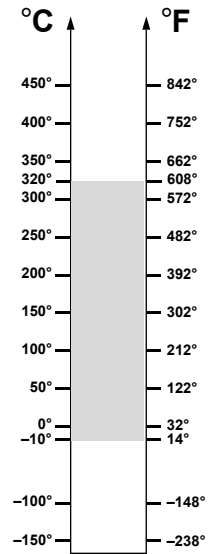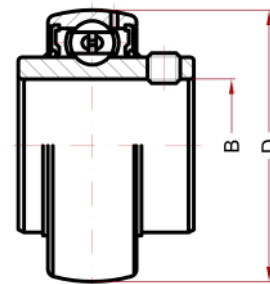

UC SERIE

Designation	Bore (B)	Diam (D)	Speed, RPM	Static Load, kN at 320°C	Static Load, kN at 20°C	Pillow Blocks suitable Housing codes		
						F Serie	FL Serie	P Serie
UC 201 BHTS ZZ 320° Beco Plus	12	47	600	4,55	6,60	F 204 SS	FL 204 SS	P 204 SS
UC 202 BHTS ZZ 320° Beco Plus	15	47	600	4,55	6,60	F 204 SS	FL 204 SS	P 204 SS
UC 203 BHTS ZZ 320° Beco Plus	17	47	600	4,55	6,60	F 204 SS	FL 204 SS	P 204 SS
UC 204 BHTS ZZ 320° Beco Plus	20	47	600	4,55	6,60	F 204 SS	FL 204 SS	P 204 SS
UC 205 BHTS ZZ 320° Beco Plus	25	52	560	5,39	7,80	F 205 SS	FL 205 SS	P 205 SS
UC 206 BHTS ZZ 320° Beco Plus	30	62	440	7,72	11,2	F 206 SS	FL 206 SS	P 206 SS
UC 207 BHTS ZZ 320° Beco Plus	35	72	400	10,4	15,1	F 207 SS	FL 207 SS	P 207 SS
UC 208 BHTS ZZ 320° Beco Plus	40	80	340	12,6	18,2	F 208 SS	FL 208 SS	P 208 SS

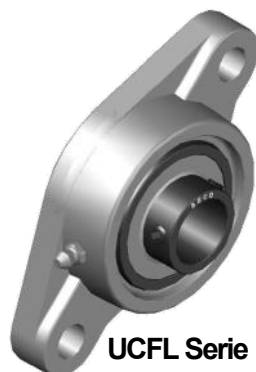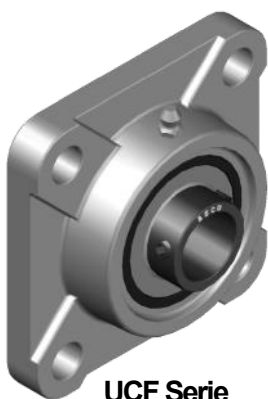

12100 Cuneo - Italy

phone: 0039 0171 66883

mail: office@becoitalia.biz

www.becoitalia.biz